

Assembly template, Ginkgo



Mark out using the hole



Mark out the vertical line



Mark out the guideline

Guideline



Mark out the vertical line



Mark out the guideline




Mark out using the hole



Horizontal line





Mark out using the hole

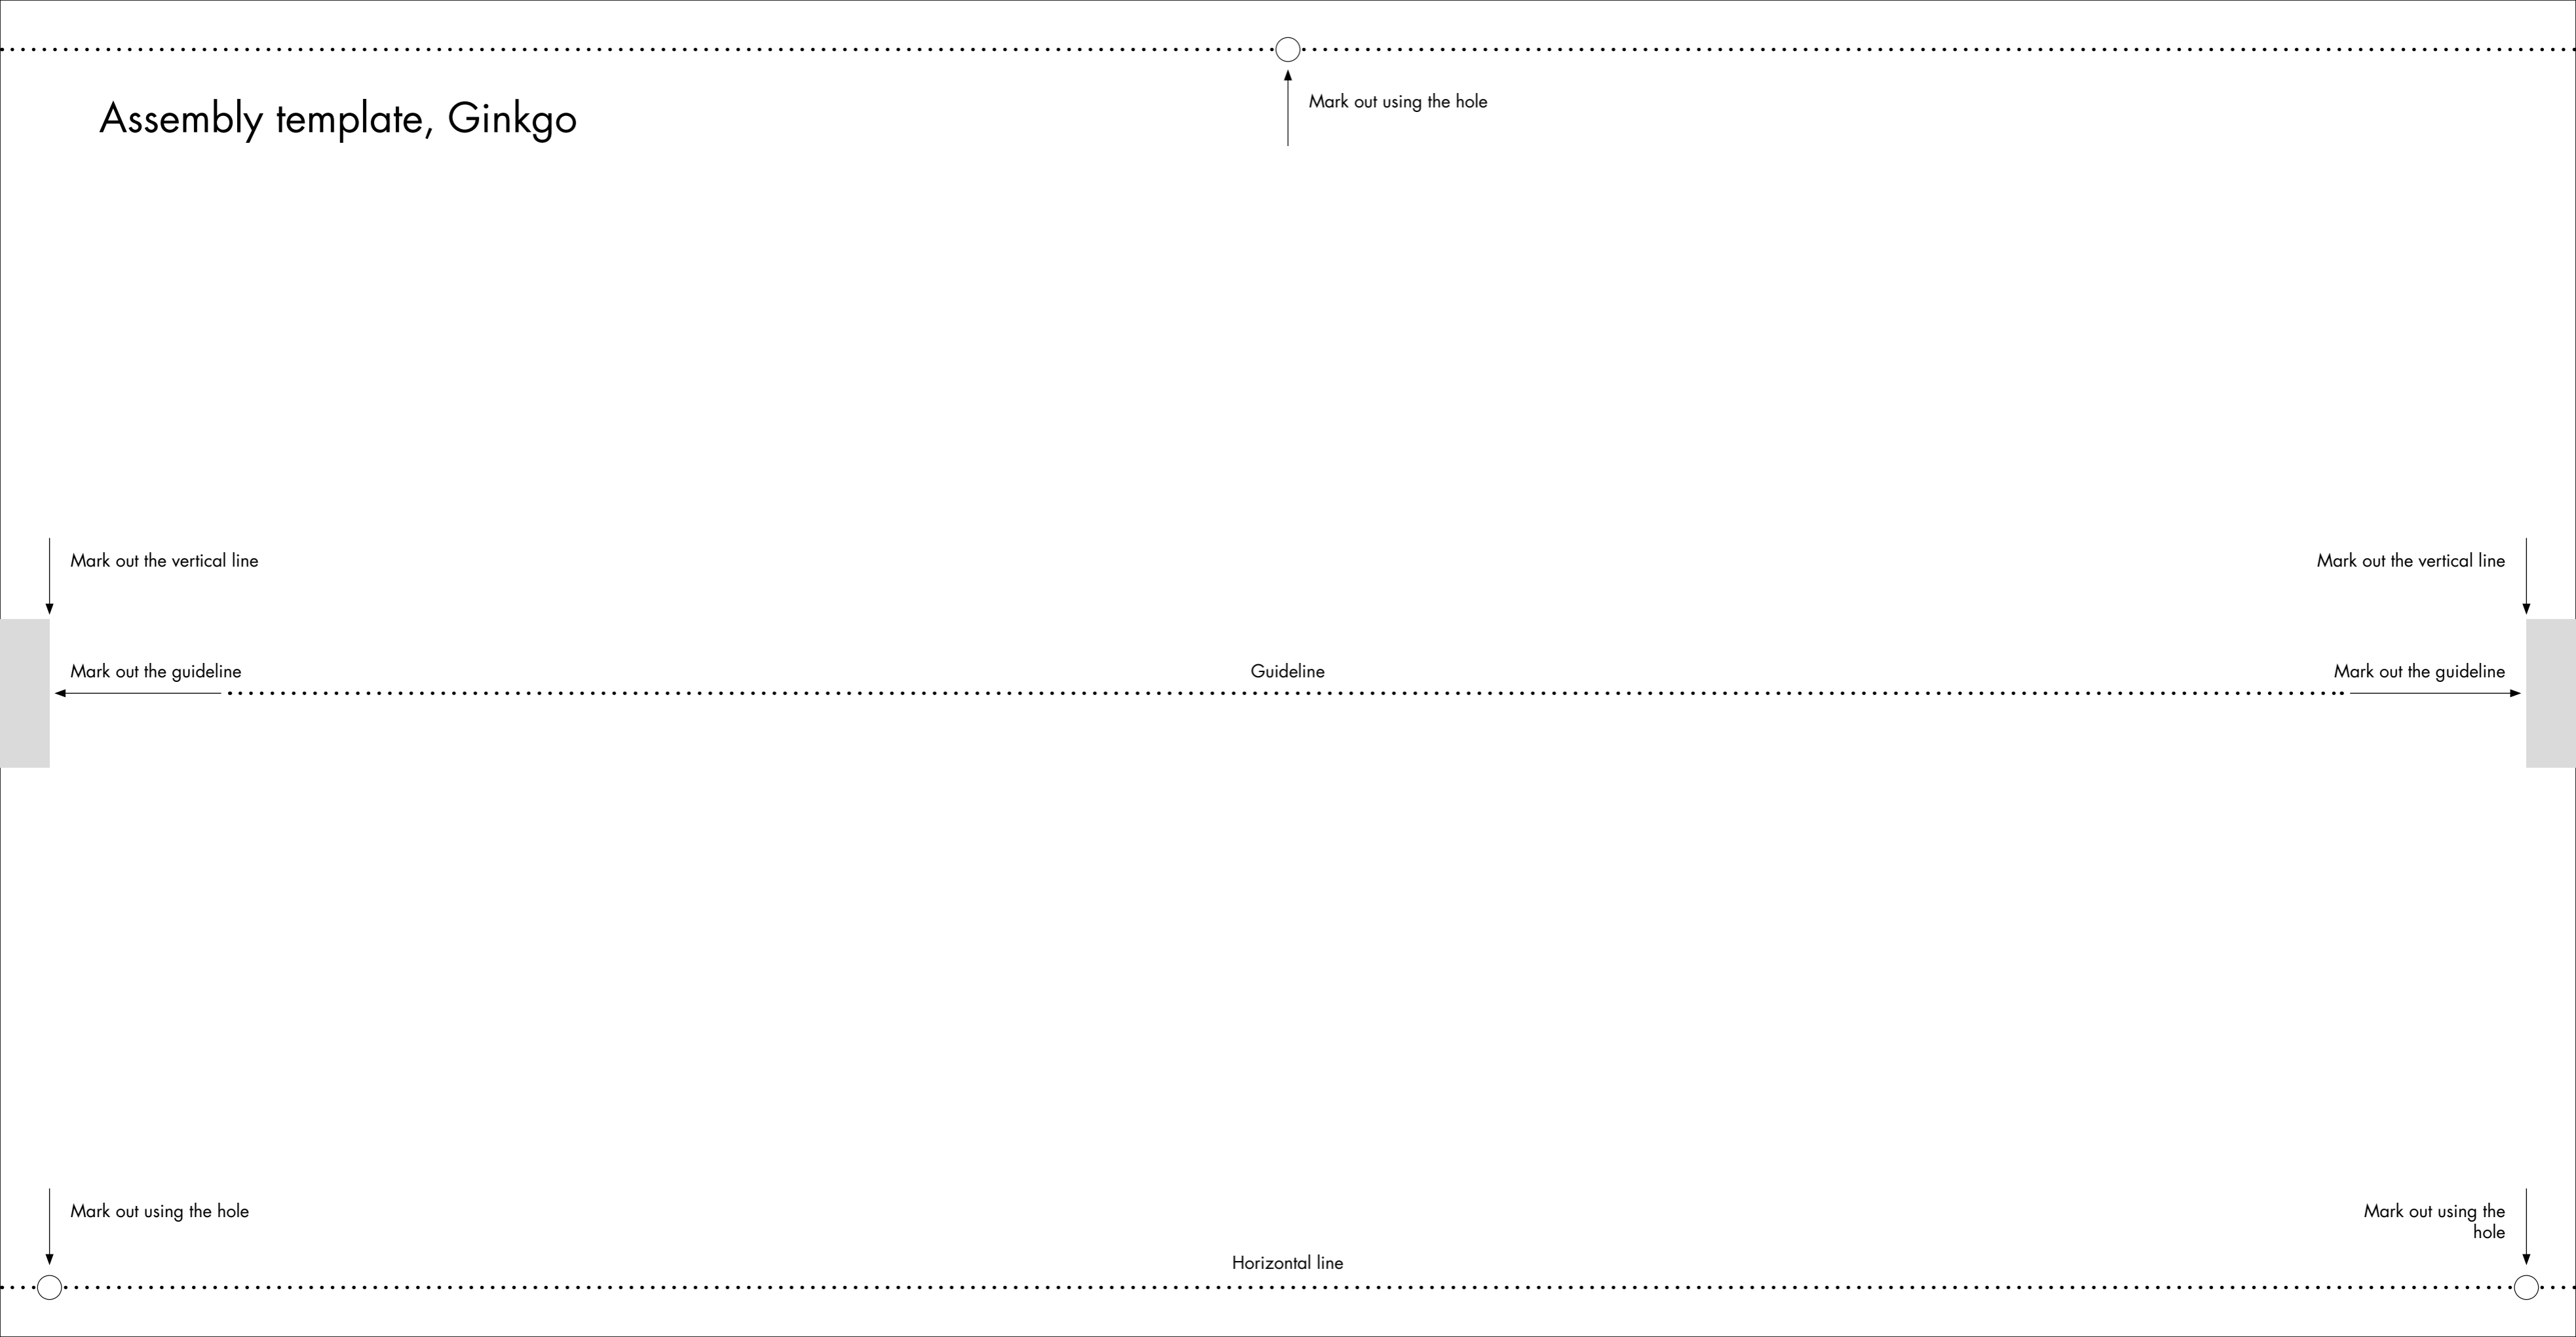

Assembly Instructions, Ginkgo

Ginkgo is easily installed using the integrated magnet and a wall-mounted metal washer.

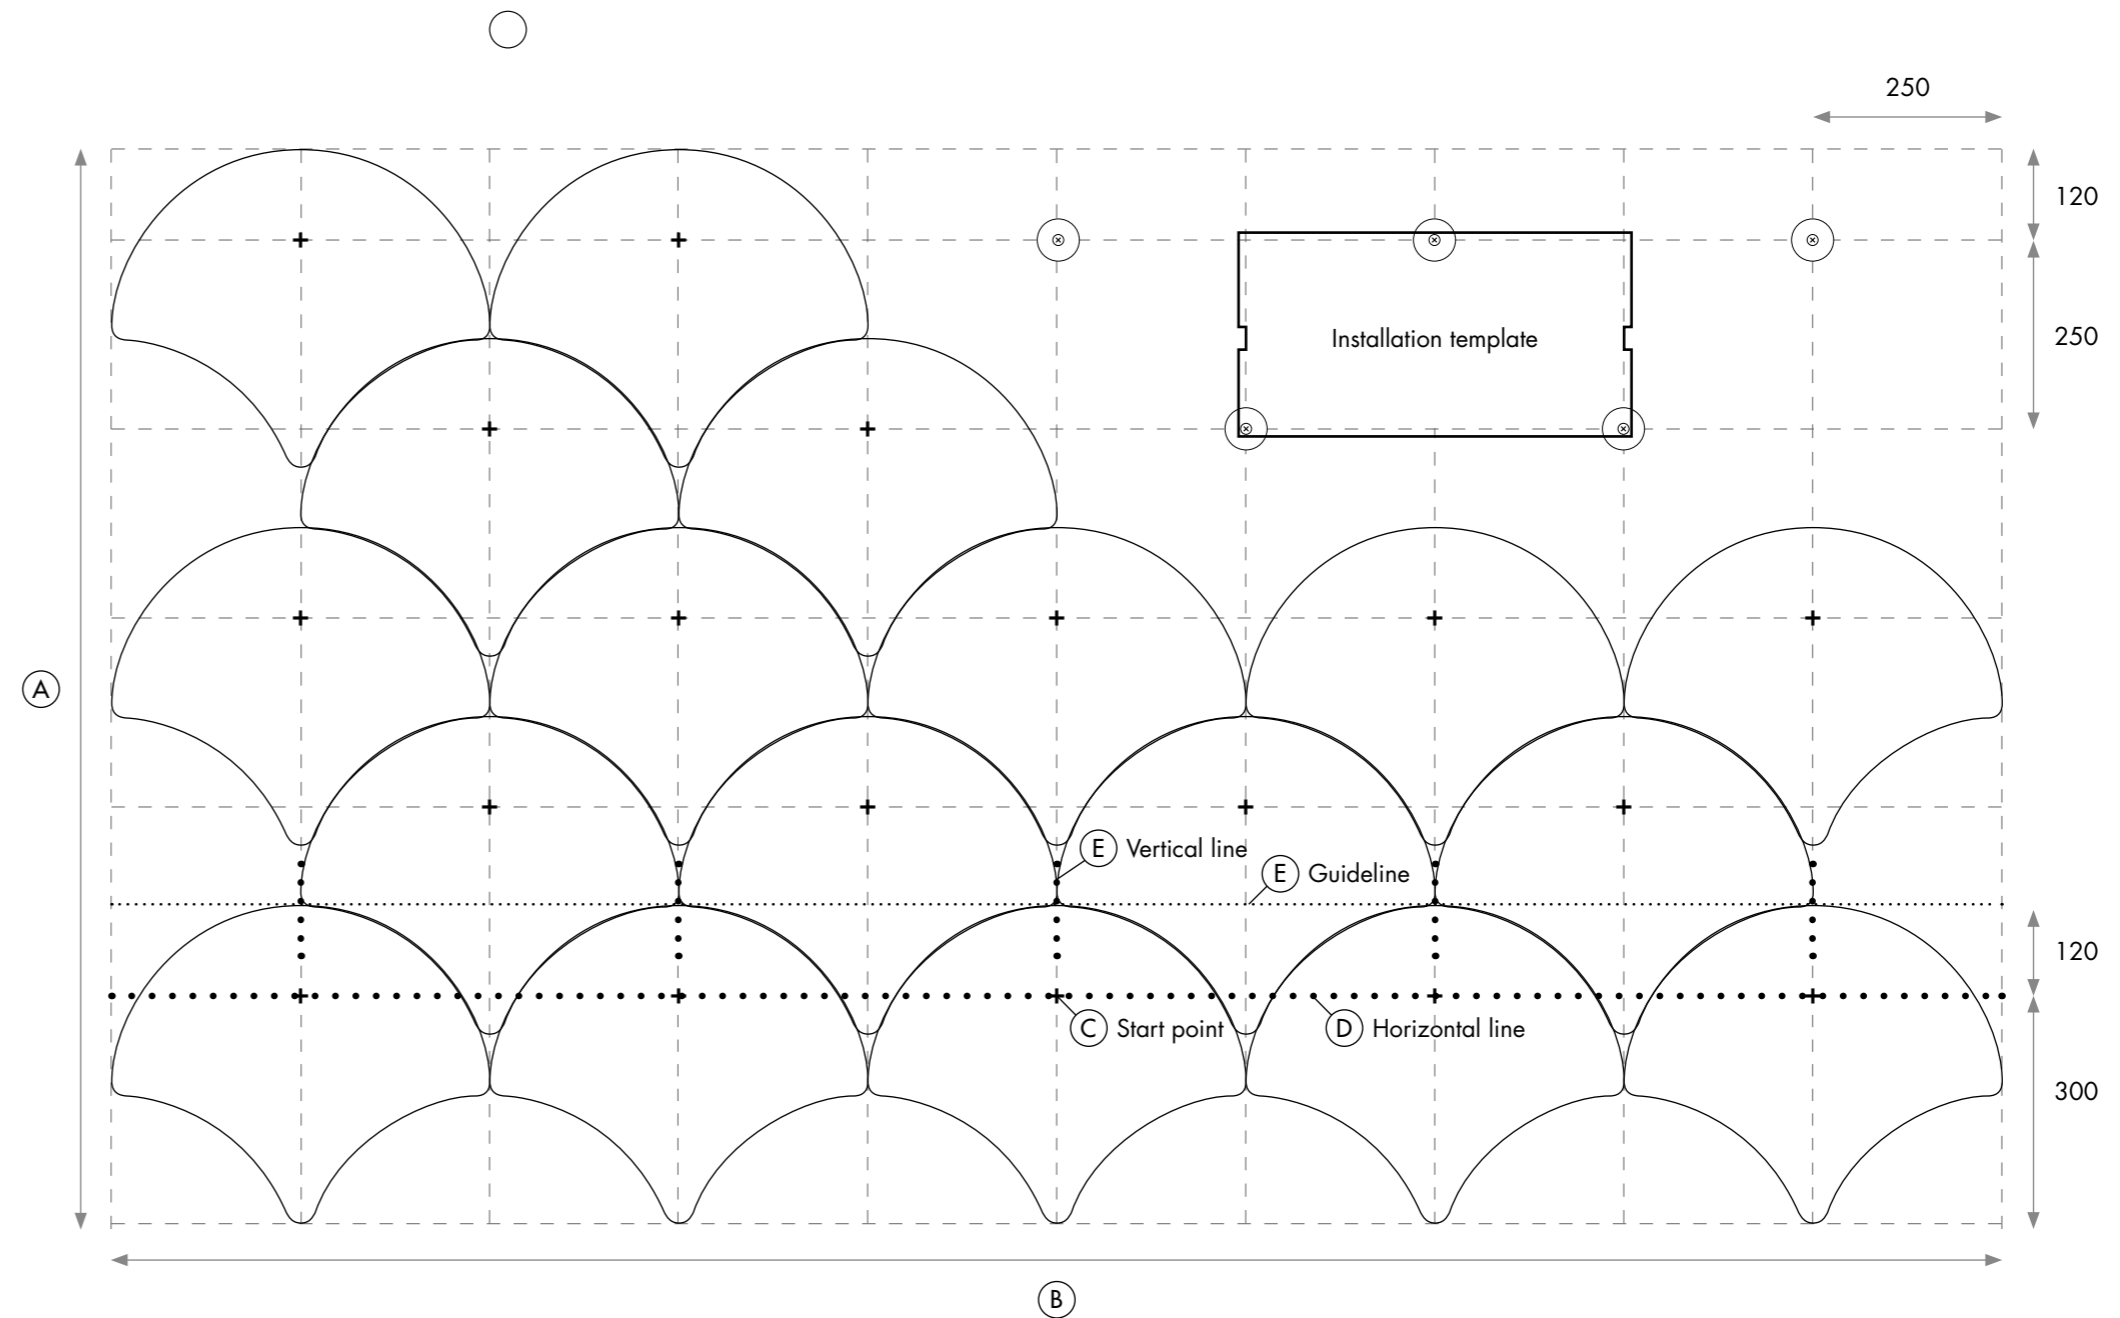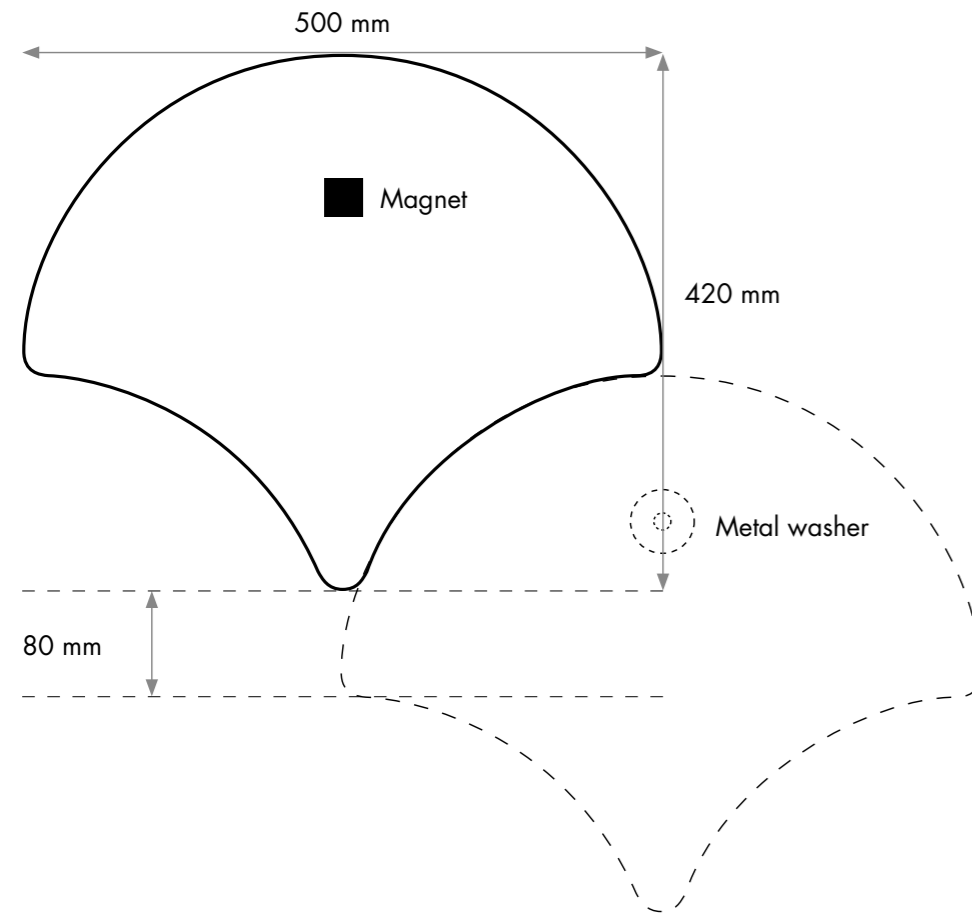

Do as follows

- Calculate the **height** and determine the section's distance from the floor to ceiling.
- Calculate the **width** and how far the section should be from one side of the room or the other.
- Decide on the location of the **start point**: It's a good idea to locate the start point in the centre of the lowest Ginkgo row with an odd number of panels (see illustration). Calculate the distance from the floor and mark the start point.
- Mark a **horizontal line** on the wall starting at the start point. We recommend using a laser.

- Place the installation template on the horizontal line (see reverse). Use the holes for marking. At the same time, mark out a **vertical line** and a **guide line** above each hole. (These markings will be used later as benchmarks for horizontal installation).
- Move the template sideways to mark out all the points along the horizontal line.
- Use the template to continue to mark out all the holes for installation on the wall.
- Fasten the metal washers to the wall. We recommend fastening the washers with screws. If you choose to

tape them in place instead, the surface must be clean and dry and at a temperature between 21 and 38° C for best adhesion.

- Now begin placing out Ginkgo on the wall by attaching the magnets to the metal washers. Begin with the row with the horizontal line. Each Ginkgo has a centre marking at the top for aligning with the appropriate vertical line. Use the vertical line and the guideline for correct installation.

